



Zhejiang Chuanken Electric Co.,Ltd.

📍 Address:Wengyang Industry Area, Liushi, Yueqing, Zhejiang, China

☎ Contact: +8615270931770

www.shckele.com

© Zhejiang Chuanken Electric Co.,Ltd. All rights reserved.

📌 Are subject to change without prior notice. Please use the latest version, Chuanken Electronics has the final interpretation right;

📞 Due to limited space, for more information, please call us!



Whatsapp



Be tolerant to diversity willing to innovation

Selection Guide

SCK300 Series High Performance AC Drive





SCK300 Series High Performance AC Drive ◀





← SCK300 Series High Performance AC Drive

SCK300 Series High Performance AC Drive

- Chinese and English LCD display, easy to install and debug;
- the Japanese wide and large structure, the product margin is large, can be used in hot weather occasions;
- with speed tracking function, can be a good application of fan secondary start;
- can do 220V, 380V, or 220/380 and other voltages;
- with short circuit, grounding and other protection;
- can add master/slave control card, communication expansion card, PG card;
- asynchronous motor, synchronous motor optional;



0.75KW-4KW



5.5KW-11KW



15KW-22KW



30KW-400KW

SCK300 Series High Performance AC Drive


product features

TI latest moto-control specific digital signal processors (DSP) with clock frequency reaching up to 150Hz are adopted.

Asynchronous motors and permanent magnet synchronous motors control are supported, with accurate autotuning. Two independent motor profiles are programmed, and the switch over of the two motors control can be realized by parameter setting or terminal input.


In V/F control mode ,accurate current limited control function makes sure of no over-currenrt fault occurred no matter the drives are running at acceleration/deceleration, or rotor locked status, well protecting the drves. h vector control mode, accurate torque limited control pledges powerful or moderate torque complying with application requirements , protecting machinery well

In V/F separated control mode, output frequency and cutput voltage can be set respectively ft for applications, such as variable frequency power sources , torque motors , etc.

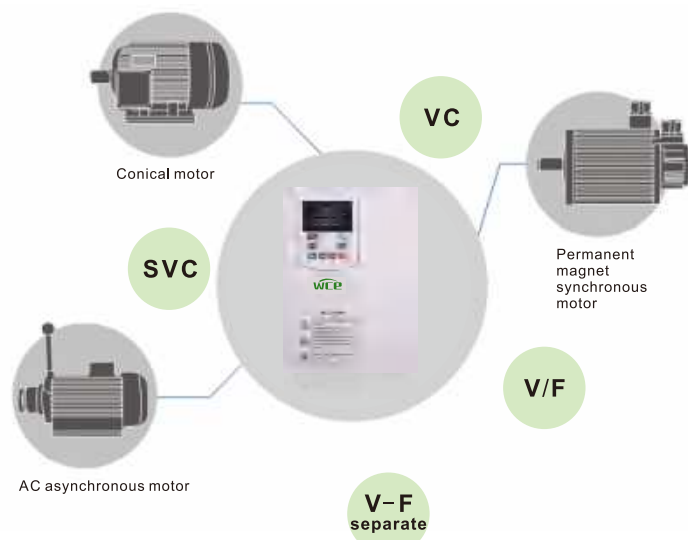

Control mode	Starting torque	Speed range	Speed accur acy	Torque response
V/F control	0.5Hz 180%	1:100	±0.5%	
Speed-sensorless control 1	0.5Hz 180%	1:100	±0.2%	<10ms
Speed-sensorless control 2	0.25Hz 180%	1:200	±0.2%	<10ms
Speed-senso control	0Hz 200%	1:1000	±0.02%	<5ms

Model explanation of SCK300

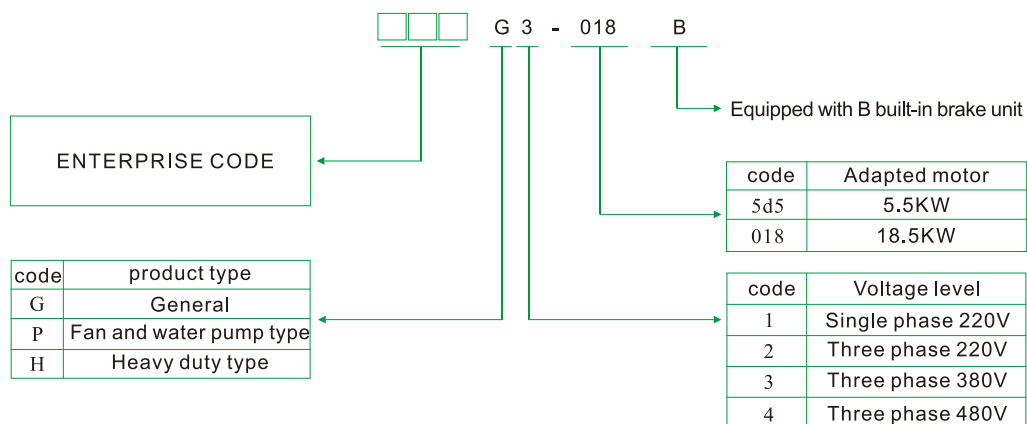

◀ SCK300 Series High Performance AC Drive

SCK300 product model and technical parameters

Single phase power supply 220V 50/60Hz				
Inverter model	Power capacity KVA	Input current	Output current	Adapt motor
SCK300 G1-0D75	1.5	10	4.5	0.75kW
SCK300 G1-1D5	3	14	7	1.5kW
SCK300 G1-2D2	4	21	10	2.2kW
SCK300 G1-004	5.9	35	16	4kW
SCK300 G1-5D5	8.9	44	20	5.5kW
SCK300 G1-7D5	17	65	30	7.5kW
SCK300 G1-011	21	90	42	11kW
SCK300 G1-015	30	120	55	15kW
SCK300 G1-018	40	150	70	18.5kW
SCK300 G1-022	57	170	80	22kW
SCK300 G1-030	69	226	110	30kW
SCK300 G1-037	85	270	130	37kW
SCK300 G1-045	114	330	160	45kW
SCK300 G1-055	134	420	200	55kW

Three phase power supply 220V 50/60Hz				
Inverter model	Power capacity KVA	Input current	Output current	Adapt motor
SCK300 G2-0D75	3	5	4.5	0.75kW
SCK300 G2-1D5	4	7.3	7	1.5kW
SCK300 G2-2D2	5.9	10.5	10	2.2kW
SCK300 G2-004	8.9	18.5	16	4kW
SCK300 G2-5D5	17	22	20	5.5kW
SCK300 G2-7D5	21	35	30	7.5kW
SCK300 G2-011	30	46.5	42	11kW
SCK300 G2-015	40	62	55	15kW
SCK300 G2-018	57	76	70	18.5kW
SCK300 G2-022	69	85	80	22kW
SCK300 G2-030	85	113	110	30kW
SCK300 G2-037	114	140	130	37kW
SCK300 G2-045	134	175	160	45kW
SCK300 G2-055	160	214	200	55kW
SCK300 G2-075	231	288	270	75kW
SCK300 G2-090	250	325	320	90kW

SCK300 Series High Performance AC Drive ◀

SCK300 product model and technical parameters

Three phase power supply 380V 50/60Hz				
Inverter model	Power capacity KVA	Input current	Output current	Adapt motor
SCK300 G3-0D75	1.5	3.4	2.5	0.75kW
SCK300 G3-1D5	3	5	3.7	1.5kW
SCK300 G3-2D2	4	5.8	5	2.2kW
SCK300 G3-004	5.9	13.5	9.5	4kW
SCK300 G3-5D5/P3-7D5	8.9	19.5	14	5.5kW/7.5kW
SCK300 G3-7D5/P3-011	11	25	18.5	7.5kW/11kW
SCK300 G3-011/P3-015	17	32	25	11kW/15kW
SCK300 G3-015/P3-018	21	40	32	15kW/18.5kW
SCK300 G3-018/P3-022	24	47	38	18.5kW/22kW
SCK300 G3-022/P3-030	30	56	45	22kW/30kW
SCK300 G3-030/P3-037	40	70	60	30kW/37kW
SCK300 G3-037/P3-045	57	80	75	37kW/45kW
SCK300 G3-045/P3-055	69	94	92	45kW/55kW
SCK300 G3-055/P3-075	85	128	115	55kW/75kW
SCK300 G3-075/P3-090	114	160	150	75kW/90kW
SCK300 G3-090/P3-110	134	190	180	90kW/110kW
SCK300 G3-110/P3-132	160	225	215	110kW/132kW
SCK300 G3-132/P3-160	192	265	260	132kW/160kW
SCK300 G3-160/P3-185	231	310	305	160kW/185kW
SCK300 G3-185/P3-200	231	345	340	185kW/200kW
SCK300 G3-200/P3-220	250	385	380	200kW/220kW
SCK300 G3-220/P3-250	280	430	425	220kW/250kW
SCK300 G3-250/P3-280	355	485	480	250kW/280kW
SCK300 G3-280/P3-315	396	545	530	280kW/315kW
SCK300 G3-315/P3-350	445	610	600	315kW/350kW
SCK300 G3-350/P3-400	500	625	650	350kW/400kW
SCK300 G3-400/P3-450	565	715	720	400kW/450kW

◀ SCK300 Series High Performance AC Drive

SCK300 product model and technical parameters

Single phase power supply 220V 50/60Hz, Output three-phase 380V				
Inverter model	Power capacity KVA	Input current	Output current	Adapt motor
SCK300 G5-0D75	1.5	10	2.5	0.75kW
SCK300 G5-1D5	3	14	3.7	1.5kW
SCK300 G5-2D2	4	21	5	2.2kW
SCK300 G5-004	5.9	35	9.5	4kW
SCK300 G5-5D5	8.9	44	14	5.5kW
SCK300 G5-7D5	11	65	18.5	7.5kW
SCK300 G5-011	17	90	25	11kW
SCK300 G5-015	21	120	32	15kW
SCK300 G5-018	24	150	38	18.5kW
SCK300 G5-022	30	170	45	22kW
SCK300 G5-030	40	226	60	30kW
SCK300 G5-037	57	270	75	37kW
SCK300 G5-045	69	330	92	45kW
SCK300 G5-055	85	420	115	55kW

Three phase power supply 660V 50/60Hz				
Inverter model	Power capacity KVA	Input current	Output current	Adapt motor
SCK300 G6-0D75	1.5	2.5	2	0.75kW
SCK300 G6-1D5	3	3	2.5	1.5kW
SCK300 G6-2D2	4	5	4	2.2kW
SCK300 G6-004	5.9	8	6	4kW
SCK300 G6-5D5	8.9	11	9	5.5kW
SCK300 G6-7D5	11	14	11	7.5kW
SCK300 G6-011	17	18	16	11kW
SCK300 G6-015	21	25	20	15kW
SCK300 G6-018	24	30	25	18.5kW
SCK300 G6-022	30	35	28	22kW
SCK300 G6-030	40	40	35	30kW
SCK300 G6-037	57	47	45	37kW



SCK300 Series High Performance AC Drive ◀

SCK300 product model and technical parameters

Three phase power supply 660V 50/60Hz				
Inverter model	Power capacity KVA	Input current	Output current	Adapt motor
SCK300 G6-045	69	52	52	45kW
SCK300 G6-055	85	65	63	55kW
SCK300 G6-075	114	85	86	75kW
SCK300 G6-090	134	95	98	90kW
SCK300 G6-110	160	118	121	110kW
SCK300 G6-132	192	145	150	132kW
SCK300 G6-160	231	165	175	160kW
SCK300 G6-185	231	190	198	185kW
SCK300 G6-200	250	210	218	200kW
SCK300 G6-220	280	230	240	220kW
SCK300 G6-250	355	255	270	250kW
SCK300 G6-280	396	286	320	280kW
SCK300 G6-315	445	334	350	315kW
SCK300 G6-350	500	360	380	350kW
SCK300 G6-400	565	411	430	400kW
SCK300 G6-450	635	445	465	450kW
SCK300 G6-500	706	518	540	500kW
SCK300 G6-560	791	578	600	560kW
SCK300 G6-630	890	655	680	630kW



◀ SCK300 Series High Performance AC Drive

Model and technical specification of SCK300

Power input

Rated input voltage	Rated input current	Frequency	Allowable voltage range
3-phase 380VAC/400VAC/415VAC 440VAC/460VAC/480VAC	SEE the table "Model and technical parameters of SCK300 series"	50HZ/60Hz, tolerance $\pm 5\%$	Voltage consecutive fluctuation $\pm 10\%$, short fluctuation $-15\% \sim 10\%$ ie. 323V ~ 528V Voltage out-of-balance rate: $< 3\%$, THD meets the standards of IEC61800-2

Power output

Applicable motor	Rated current	Output voltage	Output frequency	Over load capability
See the table "Model and technical parameters of SCK300 series". F	See the table "Model and technical parameters of SCK300 series"	3-phase; 0 ~ rated input voltage, error less than $\pm 3\%$	0.00HZ- 600Hz Resolution 0.01HZ	150% 1min; 180% 10s; 200% 0.5s, once per 10min.

Control characteristics

Control pattern	V/F control	Speed-sensor less control 1	Speed-sensor less control 2	Speed-sensor control position control
Starting torque	0.5Hz 180%	0.5Hz 180%	0.25Hz 180%	0Hz 200%
Speed range	1:100	1:100	1:200	1:100
Speed accuracy	$\pm 0.5\%$	$\pm 0.2\%$	$\pm 0.2\%$	$\pm 0.02\%$
Speed ripple	—	$\pm 0.3\%$	$\pm 0.3\%$	$\pm 0.1\%$
Torque control	NO	NO	Yes	yes
Torque accuracy	—	—	$\pm 7.5\%$	$\pm 5\%$
Torque response	—	$< 10\text{ms}$	$< 10\text{ms}$	$< 5\text{ms}$
Positioning accuracy	—	—	—	$\pm 1\text{Line pulse} \pm 1$



SCK300 Series High Performance AC Drive ◀

Basic functions

Start frequency	0.00Hz~600.00Hz
Accel/Decel time	0.00s~3600s
Carrier frequency	1.0KHz~ 15.0KHz
Frequency command mod	Digital setting +Keypad Up/Down; Digital setting+terminal Up/Down.Communication setting. Analogsetting: AI1/AI2/AB.Terminal pulse setting.
start methods	Start from starting frequency. DC injection braking at start; Flying start.
Stop methods	Ramp to stop. Coast to stop. DC injection braking at ramp stop.
Dynamic brake capability	Braking unit triggered voltage:650 ~ 750V. Service time:0.0 ~100.0s. Brake units of SCK300G3-037 and below are opti onally inbuilt.
DC braking capability	DC braking start frequency: 0.00~600.00Hz. DC braking current: constart torque 0.0~100%. DC braking time: 0.0~ 100s.
Input terminals	Eight switching input terminals, one high speed pulse input terminal. Support dry node, active PIP, NP input mode; Two analog input terminals, one of which can only be used as a voltage input and the other is optional.
output terminals	One high-speed pulse output(0~50kHz square wave output and two analog outputs(voltage/current programmable)can output signals such as command frequency, output frequency, etc one digital output. Two relay outputs.
Ercode input terminal	Support 5V/12V voltage grade. Support OC push-pull, differential signal inputsand such.

Environment

Field	Altitude	Temperature	Humidity	Vibration	Storage temperature
In doors,no direct sunlight, freeform dust, corrosive gases,flammable gases, oil mist,watervapo- , water crop, salt,etc.	0m~2000m:de-rate 1%for every100m whenabove1000 meters.	-10C~+40℃ 40℃ ~ 50℃ rated output current de-rates1% for every 1 .	5%~95%, no cond ensation.	Less thar 5.9rrls2(0.6g)	-40℃~+70℃

Others

Eff1ciency	Installation	Protection grade	Cooling method
At rated power, power levels of 7.5kW and below: ≥ 93%;11kW to 45kW power level: ≥ 95%;	Wall-mounted type(500kW and below)Cabinet type(560kW and 630kW)	IP20	Forced air cooling

◀ SCK300 Series High Performance AC Drive

Description of SCK300 control terminals function

Category	Analog input	
Terminal	Terminal designation	Specification
+10V	Analog input reference voltage	Voltage: $10.3V \pm 3\%$ Maximum output current: 25mA, ad resistance of external potentiometer should be larger than 400Ω
GND	Analog ground	Isolated from COM interior ly
AI2	Ana log input 2	The voltage and current can be 0~10V/0~20mA, which can be switched by route switch J4. Input impedance: voltage input is $20k\Omega$, current input is $500k\Omega$ Resolution: When 10V corresponds to 50Hz, the minimum resolution is 5mV Error $\pm 1\%$, 25°C
AI3	Ana log input 3	-10V~10V voltage Input impedance: $20k\Omega$ at voltage input Resolution: When 10V corresponds to 50Hz, the minimum resolution is 5mV Error $\pm 1\%$, 25°C

Category	Analog output	
Terminal	Terminal designation	Specification
AO1	Analog output 1	0mA~20mA; impedance $200 \sim 500\Omega$, 0~10V; impedance $\geq 10k\Omega$. 0mA~20mA; input impedance 500Ω , maximum input current 25mA. Switch J1 on control board for jumping between 0 ~20mA and 0~10V. Factory default: 0~10V.
AO2	Analog output 2	0mA ~20mA; impedance $200 \sim 500\Omega$, 0~10V; impedance $\geq 10k\Omega$. 0mA~20mA; input impedance 500Ω , maximum input current 25mA. Switch J2 on control board for jumping between 0~20mA and 0~10V. Factory default 0 ~10V.
GND	Analog ground	Isolated from COM interior ly

SCK300 Series High Performance AC Drive

Description of SCK300 control terminals function

Category	Terminal	Terminal designation	Specification	
Digital output	DO1	open collector output	voltage range:0~24V	Current range:0~50mA
	HDO	open collector out/Pulse out	Open collector output: same as DO1	Pulse output:0~50KHz
Relay output	RO1A/RO1B/RO1C RO2A/RO2B/RO2C	Two sets of relay outputs	RO1A common end, RO1B normally closed, RO1C normally open RO2A common end, RO2B normally closed. RO2C is always on	Contact capacity: 250VAG3A,30VDC1A.

Category	Switching input		
Terminal	Terminal designation	Specification	
+24V	+24V	24V $\pm$ 10%,isolated from GFNID inter iorly Maximun load 200mA	
PLC	Digital input common terminal	Switch between high level and low level.Short-circuited with $\pm$ 24V at delivery, low value of digital input valid, external power input.	
COM	+24V ground	Isolated from GNID interiorly	
S1~S8	Digital input terminals1~8	Input:24VDC,5mA Frequency range: 0~200Hz Voltage range: 10~30V	
HDI	Digital input/Pulse input	Voltage range: 10~30V Digital input: same as S1~S8 Pulse input: 0.1~ 50kHz;	


Cate gory	Terminal 485 interface	Keypad 485 interface
Terminal	Terminal designation	Specification
485+	Differential signal 485+	Rate: 1200/2400/4800/9600/19200/38400/57600bps
485-	Differential signal 485-	Maximum distance: 500m(use standard network cable)
GND	485 communication shielded ground	Isolated from COM inter iorly

The diagram illustrates the main wiring of a frequency converter, divided into three primary sections: AC power input, the frequency converter unit, and the output reactor.

- AC power input:** Shows three-phase input (R, S, T) passing through a circuit breaker and an input reactor to the frequency converter's input terminals (S1-S8, HDI, COM PLC).
- Frequency converter:** The central unit with various input and output terminals. It includes multifunctional input terminals 1-8, a high-speed pulse input and collection (HDI), and an electrode open circuit input optional (COM PLC). It also features a +24V PE power supply for 10V frequency setting and a -10V (External) power supply.
- Output reactor:** The output reactor is connected to the frequency converter's output terminals (DO1, HDO, COM, RS485, RO1C, RO1B, RO1A, RO2C, RO2B, RO2A). It includes a motor (M) and a grounding resistance of less than 10 ohms. The output reactor is connected to the motor (M) and the grounding resistance is less than 10 ohms.

SCK300 Series High Performance AC Drive

Overall and installation dimension

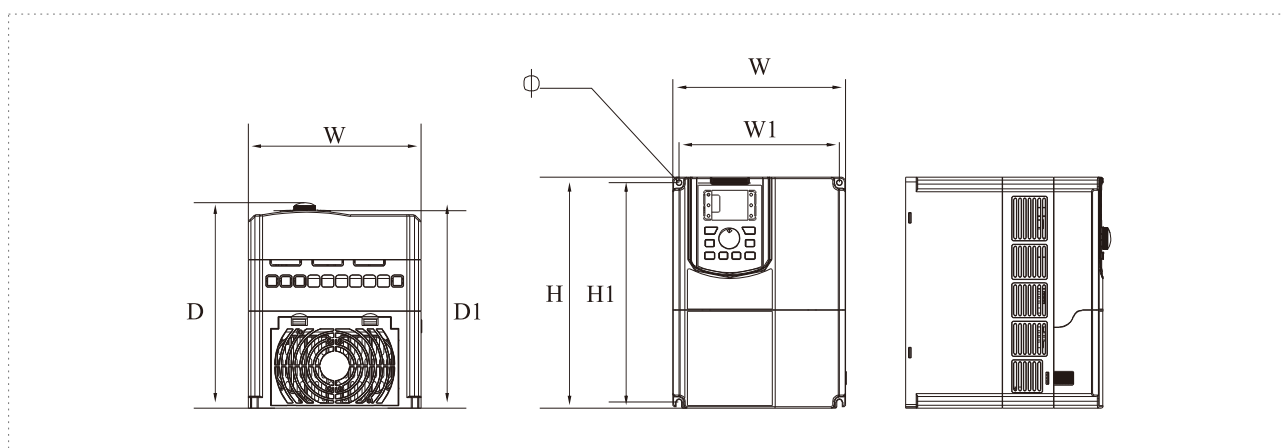

Model	SCK300 series appearance and installation dimensions (mm) outline and mounting dimensions						
	W	W1	H	H1	D	D1	Φ
SCK300 G3-0D75	108	96	134	118	149	140	5
SCK300 G3-1D5							
SCK300 G3-2D2							
SCK300 G3-004							
SCK300 G3-5D5/P3-7D5	180	167	240	228	214	205	5.5
SCK300 G3-7D5/P3-011							
SCK300 G3-011/P3-015							
SCK300 G3-015/P3-018							
SCK300 G3-018/P3-022	225	200	354	330	211	205	6
SCK300 G3-022/P3-030							
SCK300 G3-030/P3-037	240	165	450	433	236	230	7
SCK300 G3-037/P3-045							
SCK300 G3-045/P3-055	240	160	560	545	331	321	7
SCK300 G3-055/P3-075							
SCK300 G3-075/P3-090	270	195	640	617	378	368	10
SCK300 G3-090/P3-110							
SCK300 G3-110/P3-132							
SCK300 G3-132/P3-160							
SCK300 G3-160/P3-185	352	220	800	777	418	408	10
SCK300 G3-185/P3-200							
SCK300 G3-200/P3-220	360	200	940	912	494.5	484.5	17.5
SCK300 G3-220/P3-250							
SCK300 G3-250/P3-280	370	200	1140	1112	575.5	565.5	17.5
SCK300 G3-280/P3-315							
SCK300 G3-315/P3-350	400	240	1250	1222	560	550	17.5
SCK300 G3-350/P3-400							
SCK300 G3-400/P3-450							

Note: the above dimensions are subject to change without prior notice.